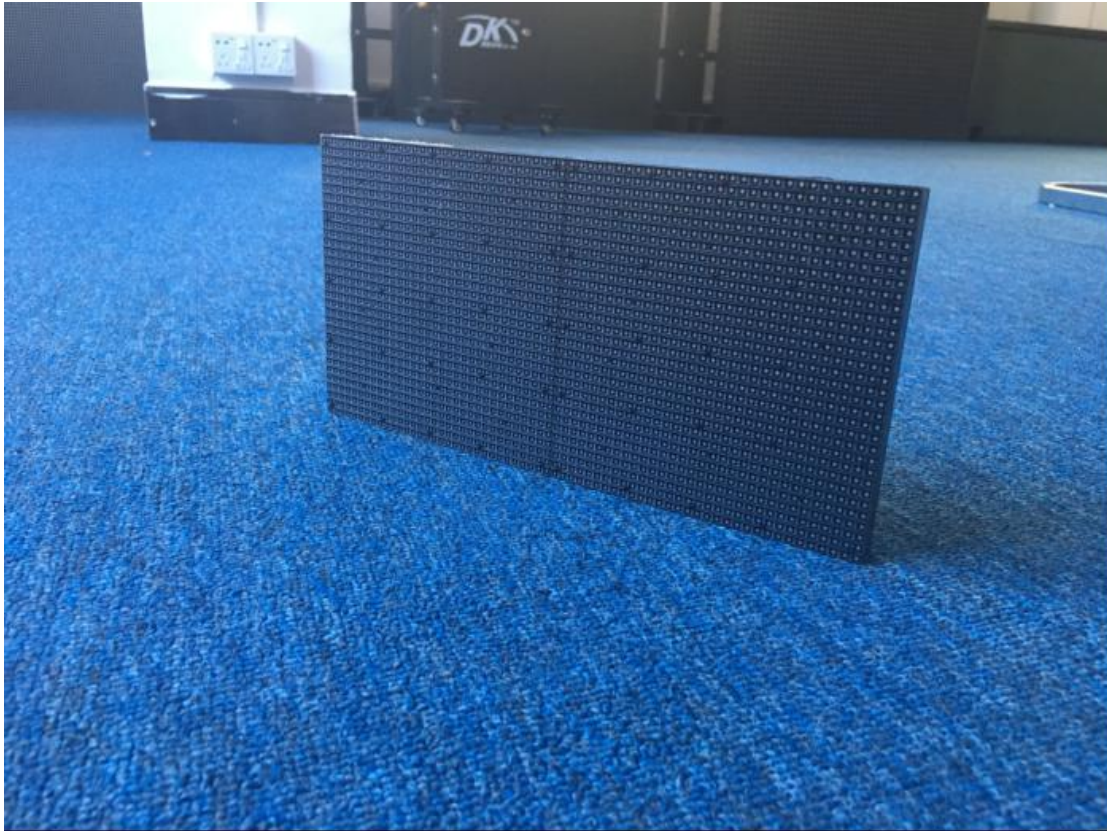

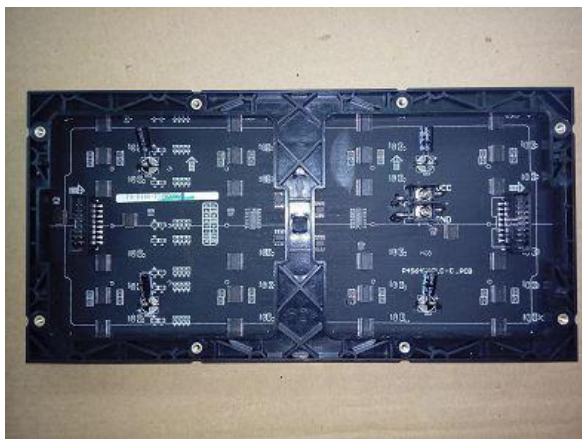


## High Definition Indoor SMD P4 Display Screen

The luminous brightness of the P4 display is strong, in the visible distance, the direct sunlight screen surface, the display content is still clearly visible, the display effect is very good.



## Specification

Product: P4 Indoor Module (SMD2121 16S)	
<b>(1)Image</b>	
	
<b>Item</b>	<b>Specification</b>
<b>(2)Pixel parameter</b>	
LED standard	(RGB) SMD2121

Pixel	PH=4mm
<b>(3)Module specification</b>	
PCB	Double-deck Separate Design
Module size(W*H*T)	256×128mm
Module resolution	64*32 dot
Pixel density(Dot/ M <sup>2</sup> )	62500dot/m <sup>2</sup>
Module Weight(Kg)	0.32kg
Brightness	≥1500cd/m <sup>2</sup>
HUB Port	HUB75
Driving Mode	1/16 Scan
Viewing Angle	Horizontal: 120°, Vertical: 120°
Best Viewing Distance	4-100M
Gray Scale	Red、Green、Blue 256Grade
Refresh Frequency	≥200HZ
Color display	Display 16.7M color
Life Span	≥100000 Hrs
Blind Dot Rate	≤3PPM
Working Voltage	DC5V
Max Power Consumption	≤20W/piece
Power Consumption	≤10W/piece
1m <sup>2</sup> Max Power Consumption	≤610w/ m <sup>2</sup>
1m <sup>2</sup> Average Power	≤300w/ m <sup>2</sup>
Operating Temperature	-20℃ ~ +60℃
Operating Humidity	10%~90%RH
<b>(4)Package</b>	
Packing Size(mm)	450mm*420mm*260mm
Packing Number(piece)	90PCS
Weight (kg)	30kg